


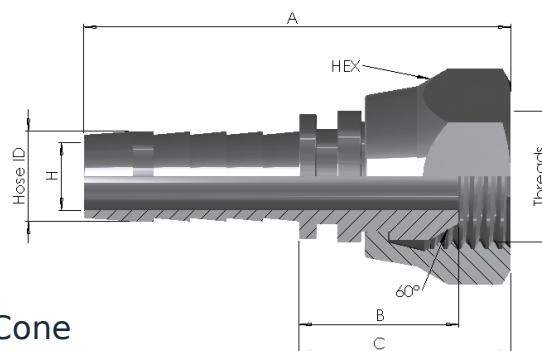

Standard Hose Insert x BSPP Female Swivel 60° Cone

60° connection · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
01000404316	1/4"	8	G 1/4"	51	17	24	Ø4.5	19	0.024
01000406316	1/4"	8	G 3/8"	55	21	28	Ø4.5	22	0.046
01000408316	1/4"	8	G 1/2"	56.5	22.5	29.5	Ø4.5	22	0.076
01000604316	3/8"	10	G 1/4"	54	18	25	Ø7/4.5	19	0.033
01000606316	3/8"	10	G 3/8"	58	21	28	Ø7	22	0.051
01000608316	3/8"	10	G 1/2"	60	23	30	Ø7	27	0.076
01000806316	1/2"	15	G 3/8"	59	22	28	Ø10/7	22	0.060
01000808316	1/2"	15	G 1/2"	61	23	30	Ø10	27	0.080
01000810316	1/2"	15	G 5/8"	62	23	31	Ø10	30	0.092
01000812316	1/2"	15	G 3/4"	65	23	33	Ø10	32	0.109
01000816316	1/2"	15	G 1"	65	25	35	Ø10	41	0.182
01001008316	5/8"	16	G 1/2"	65	23	30	Ø10	27	0.110

↓ Continued on page 2

0100 · BSPP Female Swivel 60° Cone

Dimensions & variants — continued

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
01001010316	5/8"	16	G 5/8"	66	23	32	Ø12	30	0.106
01001012316	5/8"	16	G 3/4"	68	24	34	Ø12	32	0.122
01001208316	3/4"	20	G 1 1/2"	70	25	32	Ø15/10	27	0.139
01001210316	3/4"	20	G 5/8"	71	24	32	Ø15/12	30	0.130
01001212316	3/4"	20	G 3/4"	73	25	35	Ø15	32	0.130
01001216316	3/4"	20	G 1"	73	25	35	Ø15	41	0.199
01001612316	1"	25	G 3/4"	83	25	35	Ø20	41	0.194
01001616316	1"	25	G 1"	83	25	35	Ø20	41	0.228
01002020316	1 1/4"	32	G 1 1/4"	97	29	42	Ø24.5	50	0.459
01002424316	1 1/2"	40	G 1 1/2"	102	32	45	Ø32	55	0.535
01003232316	2"	50	G 2"	114	36	52	Ø45	75	0.901

Article number: 0100 | 04 | 04 | 316
Series | Hose size | BSPP size | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-2" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Threaded connection BSPP Female Swivel Straight · 60° Cone Connection: ISO 8434-6 Thread: ISO 228-1	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	--	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.