




Standard Hose Insert × BSPP Female Swivel 60° Cone, Elbow 45°

60° connection · 45° Bend · Made in Norway

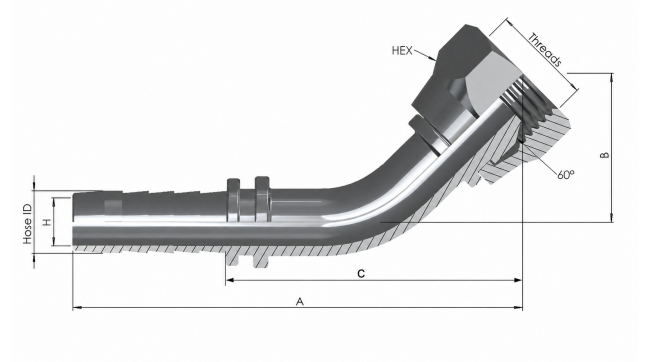

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
01450404316	1/4"	8	G 1/4"	65	15	38	Ø4.5	19	0.031
01450606316	3/8"	10	G 3/8"	75	20	45	Ø7	22	0.062
01450808316	1/2"	15	G 1/2"	87	24	56	Ø10	27	0.092
01451010316	5/8"	16	G 5/8"	99	31	65	Ø12	30	0.150
01451212316	3/4"	20	G 3/4"	114	33	76	Ø15	32	0.220
01451616316	1"	25	G 1"	140	37	92	Ø19	41	0.411
01452020316	1 1/4"	32	G 1 1/4"	167	43	112	Ø24	50	0.755
01452424316	1 1/2"	40	G 1 1/2"	191	53	133	Ø30	55	1.142
01453232316	2"	50	G 2"	243	68	181	Ø40	75	3.100

Article number: 0145 | 04 | 04 | 316

Series | Hose size | BSPP size | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-2" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Threaded connection BSPP Female Swivel 45° Bend · 60° Cone Connection: ISO 8434-6 Thread: ISO 228-1	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	--	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.