


PRODUCT GROUP
0200
BSPP

MATERIAL
SS316L
Stainless steel

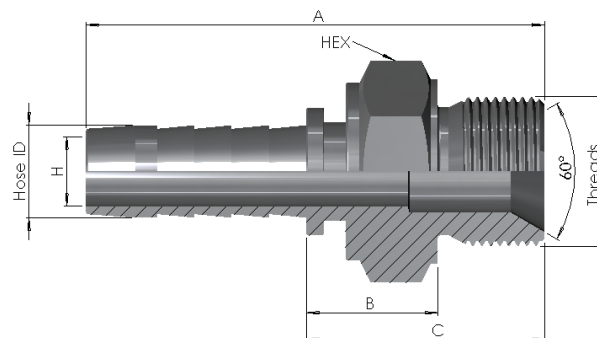

Standard Hose Insert x BSPP Male 60° Internal Cone

60° connection · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
02000404316	1/4"	8	G 1/4"	54	16	27	Ø4.5	19	0.035
02000406316	1/4"	8	G 3/8"	57	17	30	Ø4.5	22	0.056
02000408316	1/4"	8	G 1/2"	60	18.5	33.5	Ø4.5	27	0.080
02000604316	3/8"	10	G 1/4"	57	16	27	Ø6.5	19	0.039
02000606316	3/8"	10	G 3/8"	60	17	30	Ø7	22	0.051
02000608316	3/8"	10	G 1/2"	63	18.5	33.5	Ø7	27	0.083
02000806316	1/2"	15	G 3/8"	61.5	17	30	Ø9.5	22	0.056
02000808316	1/2"	15	G 1/2"	64.5	18.5	33.5	Ø10	27	0.092
02000810316	1/2"	15	G 5/8"	67	19	35	Ø10	30	0.113
02000812316	1/2"	15	G 3/4"	69	22	39	Ø10	32	0.136
02000816316	1/2"	15	G 1"	72	23	42	Ø10	41	0.232
02001008316	5/8"	16	G 1/2"	68	18.5	33.5	Ø12	27	0.112

↓ Continued on page 2

0200 · BSPP Male 60° Internal Cone

Dimensions & variants — continued

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
02001010316	5/8"	16	G 5/8"	70	20	36	Ø12	30	0.126
02001012316	5/8"	16	G 3/4"	72	22	39	Ø12	32	0.145
02001208316	3/4"	20	G 1/2"	73	18.5	33.5	Ø15/12	27	0.116
02001210316	3/4"	20	G 5/8"	75	20	36	Ø15/12	30	0.148
02001212316	3/4"	20	G 3/4"	77	22	39	Ø15	32	0.161
02001216316	3/4"	20	G 1"	81	24	43	Ø15	41	0.269
02001612316	1"	25	G 3/4"	87	22	39	Ø15	32	0.260
02001616316	1"	25	G 1"	91	24	43	Ø20	41	0.293
02002020316	1 1/4"	32	G 1 1/4"	102	25	47	Ø24.5	50	0.497
02002424316	1 1/2"	40	G 1 1/2"	105	25.5	47.5	Ø32	55	0.594
02003232316	2"	50	G 2"	118	30	56	Ø45	70	0.880

Article number: 0200 | 04 | 04 | 316

Series | Hose size | BSPP size | Material

Product specifications

End 1 — Hose connection	End 2 — Threaded connection	General product information
Standard Hose Insert Hose size: 1/4"-2" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	BSPP Male · 60° Internal Cone Connection: ISO 8434-6 Shoulder seal: ISO 1179-2 Thread: ISO 228-1	Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.