


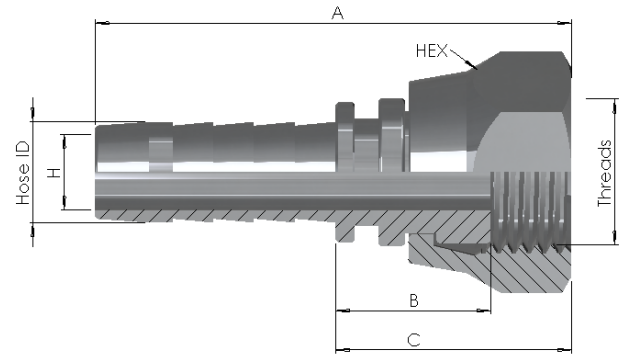

Standard Hose Insert x BSPP Female Swivel Flat Face

Flat sealing · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
03000404316	1/4"	8	G 1/4"	51	15	22	Ø4.5	19	0.024
03000406316	1/4"	8	G 3/8"	55	19	26	Ø4.5	22	0.046
03000604316	3/8"	10	G 1/4"	54	16	23	Ø7/4.5	19	0.033
03000606316	3/8"	10	G 3/8"	58	19	26	Ø7	22	0.048
03000608316	3/8"	10	G 1/2"	60	20	27	Ø7	27	0.076
03000806316	1/2"	15	G 3/8"	59	20	26	Ø10/7	22	0.060
03000808316	1/2"	15	G 1/2"	61	20	27	Ø10	27	0.080
03000812316	1/2"	15	G 3/4"	65	20	30	Ø10	32	0.109
03001208316	3/4"	20	G 1/2"	70	23	30	Ø15/10	27	0.139
03001212316	3/4"	20	G 3/4"	73	22	32	Ø15	32	0.126
03001216316	3/4"	20	G 1"	73	22	32	Ø15	41	0.199
03001616316	1"	25	G 1"	83	22	32	Ø20	41	0.223

Article number: 0300 | 04 | 04 | 316

Series | Hose size | BSPP size | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-1" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Threaded connection BSPP Female Swivel Straight · Flat Face Flat sealing Thread: ISO 228-1	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	---	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.