


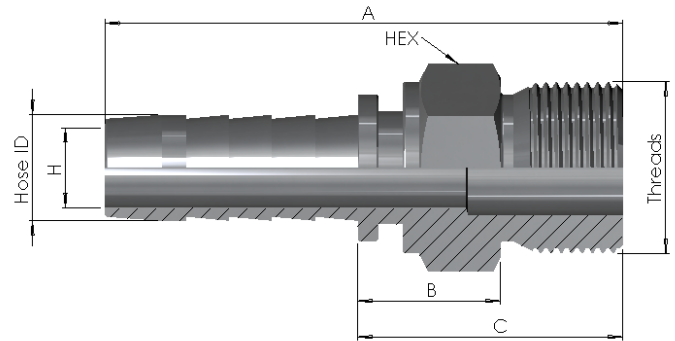

Standard Hose Insert x BSPP Male Flat Face

Flat sealing · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex	Weight (kg)
04000404316	1/4"	8	G 1/4"	54	16	27	Ø4.5	17	0.024
04000406316	1/4"	8	G 3/8"	57	17	30	Ø4.5	19	0.033
04000604316	3/8"	10	G 1/4"	57	16	27	Ø6.5	17	0.034
04000606316	3/8"	10	G 3/8"	60	17	30	Ø7	19	0.040
04000608316	3/8"	10	G 1/2"	63	18.5	33.5	Ø7	22	0.058
04000806316	1/2"	15	G 3/8"	61.5	17	30	Ø9.5	22	0.070
04000808316	1/2"	15	G 1/2"	64.5	18.5	33.5	Ø10	22	0.084
04000812316	1/2"	15	G 3/4"	68.5	21	38	Ø10	27	0.140
04001208316	3/4"	20	G 1/2"	71.5	18.5	33.5	Ø15	27	0.138
04001212316	3/4"	20	G 3/4"	76	21	38	Ø15	27	0.156
04001216316	3/4"	20	G 1"	81	21	38	Ø15	36	0.210
04001616316	1"	25	G 1"	91	21	43	Ø20	36	0.250

Article number: 0400 | 04 | 04 | 316

Series | Hose size | BSPP size | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-1" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Threaded connection BSPP Male Straight · Flat Face Flat sealing Thread: ISO 228-1	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	--	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.