


PRODUCT GROUP
1100
NPT

MATERIAL
SS316L
Stainless steel

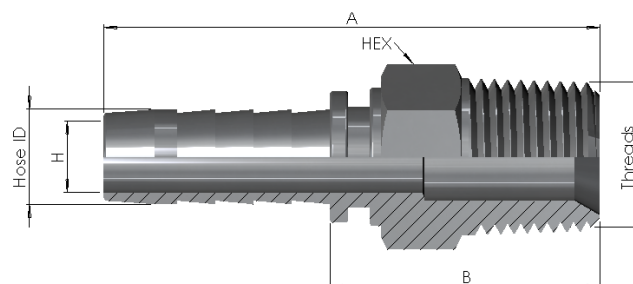

Standard Hose Insert x NPT Male

Tapered thread · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	H	Hex	Weight (kg)
11000404316	1/4"	8	1/4" NPT	55	28	Ø4.5	17	0.030
11000406316	1/4"	8	3/8" NPT	59	29	Ø4.5	19	0.042
11000604316	3/8"	10	1/4" NPT	58	28	Ø7	17	0.038
11000606316	3/8"	10	3/8" NPT	62	32	Ø7	19	0.050
11000608316	3/8"	10	1/2" NPT	66	36	Ø7	22	0.074
11000806316	1/2"	15	3/8" NPT	64	33	Ø9.5	19	0.052
11000808316	1/2"	15	1/2" NPT	68	37	Ø10	22	0.077
11000812316	1/2"	15	3/4" NPT	72	42	Ø10	27	0.125
11001208316	3/4"	20	1/2" NPT	79	41	Ø10	27	0.120
11001212316	3/4"	20	3/4" NPT	80	42	Ø15	27	0.145
11001216316	3/4"	20	1" NPT	85	47	Ø15	36	0.236
11001616316	1"	25	1" NPT	97	49	Ø20	36	0.288

↓ Continued on page 2

1100 · NPT Male

Dimensions & variants — continued Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	H	Hex	Weight (kg)
11002020316	1 1/4"	32	1 1/4" NPT	105	50	Ø24.5	46	0.479
11002424316	1 1/2"	40	1 1/2" NPT	110	52.5	Ø32	50	0.567
11003232316	2"	50	2" NPT	126	64	Ø45	65	0.878

Article number: 1100 | 04 | 04 | 316
Series | Hose size | NPT size | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-2" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Threaded connection NPT Male Straight Thread: ASME B1.20.1	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	--	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.