


PRODUCT GROUP
1400
Metric

MATERIAL
SS316L
Stainless steel

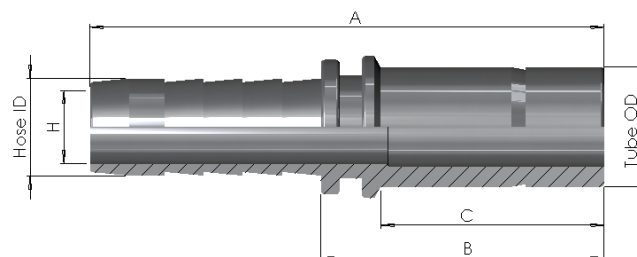

Standard Hose Insert x Standpipe Metric

Tube OD in mm · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube OD	A	B	C	H	Weight (kg)
14000406316	1/4"	8	6 mm	57	30	23	Ø4	0.010
14000408316	1/4"	8	8 mm	57	30	23	Ø4.5	0.012
14000410316	1/4"	8	10 mm	59	32	25	Ø4.5	0.016
14000610316	3/8"	10	10 mm	63	33	25	Ø7	0.021
14000612316	3/8"	10	12 mm	63	33	25	Ø7	0.025
14000614316	3/8"	10	14 mm	68	38	30	Ø7	0.038
14000615316	3/8"	10	15 mm	65	35	27	Ø7	0.036
14000812316	1/2"	15	12 mm	64	33	25	Ø8	0.040
14000815316	1/2"	15	15 mm	66	35	27	Ø10	0.040
14000816316	1/2"	15	16 mm	69	38	30	Ø10	0.046
14000818316	1/2"	15	18 mm	67	36	27	Ø10	0.052
14000820316	1/2"	15	20 mm	75	44	35	Ø10	0.076

↓ Continued on page 2

1400 · Standpipe Metric

Dimensions & variants — continued

Dimensions in mm

Item number	Hose ID	DN	Tube OD	A	B	C	H	Weight (kg)
14001018316	5/8"	16	18 mm	70	36	27	Ø12	0.063
14001020316	5/8"	16	20 mm	78	44	35	Ø12	0.092
14001220316	3/4"	20	20 mm	83	45	35	Ø15	0.086
14001222316	3/4"	20	22 mm	77	39	29	Ø15	0.095
14001225316	3/4"	20	25 mm	88	50	40	Ø15	0.130
14001228316	3/4"	20	28 mm	78	40	30	Ø15	0.130
14001625316	1"	25	25 mm	99	61	40	Ø20	0.160
14001628316	1"	25	28 mm	89	41	30	Ø20	0.175
14001630316	1"	25	30 mm	102	54	43	Ø20	0.236
14002035316	1 1/4"	32	35 mm	102	47	35	Ø24.5	0.450
14002038316	1 1/4"	32	38 mm	112	57	45	Ø24.5	0.485
14002442316	1 1/2"	40	42 mm	110	53	40	Ø32	0.510

Article number: 1400 | 04 | 06 | 316

Series | Hose size | Tube OD | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-1 1/2" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Tube connection Metric standpipe Straight Outside diameter: see Tube OD Tube OD in mm	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	--	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.