


PRODUCT GROUP
1490
Metric

MATERIAL
SS316L
Stainless steel

Standard Hose Insert × Standpipe Metric, Elbow 90°

Tube OD in mm · 90° Bend · Made in Norway

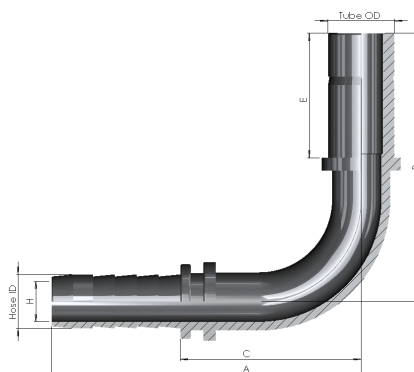

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube OD	A	B	C	E	H	Weight (kg)
14900406316	1/4"	8	6 mm	57	43	30	23	Ø4	0.023
14900408316	1/4"	8	8 mm	57	43	30	23	Ø4.5	0.024
14900410316	1/4"	8	10 mm	57	45	30	25	Ø4.5	0.031
14900610316	3/8"	10	10 mm	64	49	34	25	Ø7	0.038
14900612316	3/8"	10	12 mm	64	49	34	25	Ø7	0.074
14900614316	3/8"	10	14 mm	64	54	34	30	Ø7	0.090
14900615316	3/8"	10	15 mm	64	51	34	27	Ø7	0.083
14900812316	1/2"	15	12 mm	73	57	42	25	Ø8	0.081
14900815316	1/2"	15	15 mm	73	59	42	27	Ø10	0.083
14900816316	1/2"	15	16 mm	73	62	42	35	Ø10	0.086
14900818316	1/2"	15	18 mm	73	60	42	27	Ø10	0.085
14900820316	1/2"	15	20 mm	73	70	42	35	Ø10	0.157

↓ Continued on page 2

1490 · Standpipe Metric 90°

Dimensions & variants — continued

Dimensions in mm

Item number	Hose ID	DN	Tube OD	A	B	C	E	H	Weight (kg)
14901018316	5/8"	16	18 mm	88	62	54	27	Ø12	0.148
14901020316	5/8"	16	20 mm	88	70	54	35	Ø12	0.173
14901220316	3/4"	20	20 mm	101	82	63	35	Ø15	0.200
14901222316	3/4"	20	22 mm	101	76	63	29	Ø15	0.186
14901225316	3/4"	20	25 mm	101	87	63	40	Ø15	0.265
14901625316	1"	25	25 mm	124	102	76	40	Ø19	0.480
14901628316	1"	25	28 mm	124	92	76	30	Ø19	0.410
14901630316	1"	25	30 mm	124	105	76	43	Ø19	0.500
14902035316	1 1/4"	32	35 mm	155	108	100	35	Ø24	0.800
14902038316	1 1/4"	32	38 mm	155	118	100	45	Ø24	0.840
14902442316	1 1/2"	40	42 mm	175	129	117	40	Ø30	1.230

Article number: 1490 | 04 | 06 | 316

Series | Hose size | Tube OD | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1 1/2"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Tube connection

Metric standpipe
90° Bend
Outside diameter: see Tube OD
Tube OD in mm

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.