


PRODUCT GROUP
2100
Light Series

MATERIAL
SS316L
Stainless steel

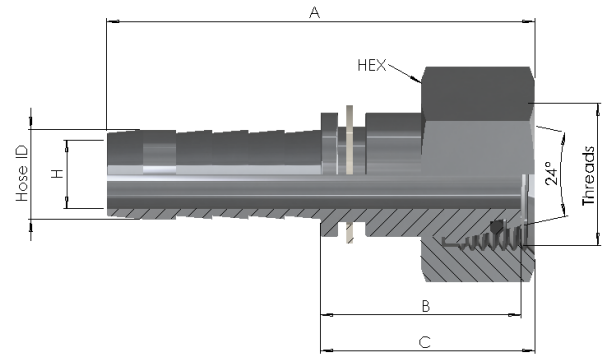

Standard Hose Insert x Metric 24° Female

24° connection • Straight • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
21000408316	1/4"	8	8L	M14×1.5	50	22	23	Ø4.5	17	0.025
21000410316	1/4"	8	10L	M16×1.5	53	25	26	Ø4.5	19	0.033
21000612316	3/8"	10	12L	M18×1.5	59	27	29	Ø7	22	0.054
21000815316	1/2"	15	15L	M22×1.5	62	29	31	Ø10	27	0.080
21000818316	1/2"	15	18L	M26×1.5	63	30	32	Ø10	32	0.118
21001018316	5/8"	16	18L	M26×1.5	67	31	33	Ø12	32	0.121
21001222316	3/4"	20	22L	M30×2.0	76	34	38	Ø15	36	0.173
21001628316	1"	25	28L	M36×2.0	86	34	38	Ø20	41	0.254
21002035316	1 1/4"	32	35L	M45×2.0	97	39	42	Ø24.5	50	0.420
21002442316	1 1/2"	40	42L	M52×2.0	100	40	43	Ø32	60	0.575

Article number: 2100 | 04 | 08 | 316

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1 1/2"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Female Swivel
Straight · Light Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6H / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.