


PRODUCT GROUP
2145
Light Series

MATERIAL
SS316L
Stainless steel

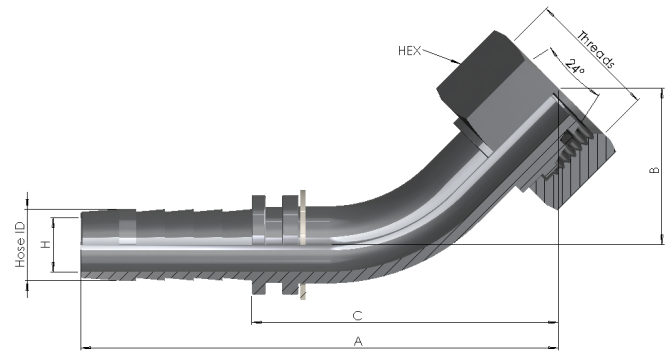

Standard Hose Insert x Metric 24° Female, Elbow 45°

24° connection • 45° Bend • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
21450408316	1/4"	8	8L	M14×1.5	62	16	39	Ø4.5	17	0.031
21450410316	1/4"	8	10L	M16×1.5	63	17	40	Ø4.5	19	0.041
21450612316	3/8"	10	12L	M18×1.5	75	20	45	Ø7	22	0.058
21450815316	1/2"	15	15L	M22×1.5	86	23	55	Ø10	27	0.104
21450818316	1/2"	15	18L	M26×1.5	86	23	55	Ø10	32	0.129
21451018316	5/8"	16	18L	M26×1.5	99	31	65	Ø12	32	0.153
21451222316	3/4"	20	22L	M30×2.0	114	33	76	Ø15	36	0.246
21451628316	1"	25	28L	M36×2.0	140	37	92	Ø19	41	0.404
21452035316	1 1/4"	32	35L	M45×2.0	171	47	116	Ø24	50	0.750
21452442316	1 1/2"	40	42L	M52×2.0	191	53	133	Ø30	60	1.132

Article number: 2145 | 04 | 08 | 316

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1 1/2"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Female Swivel
45° Bend · Light Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6H / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.