


PRODUCT GROUP
2190
Light Series

MATERIAL
SS316L
Stainless steel

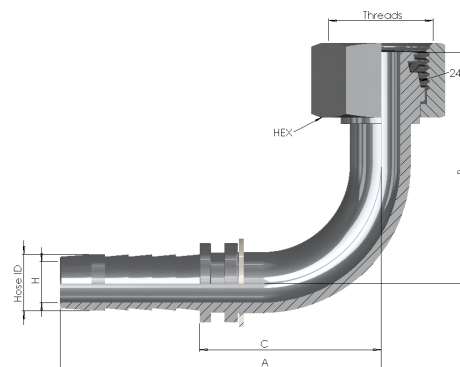

Standard Hose Insert × Metric 24° Female, Elbow 90°

24° connection • 90° Bend • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
21900408316	1/4"	8	8L	M14×1.5	54	31	31	Ø4.5	17	0.035
21900410316	1/4"	8	10L	M16×1.5	54	32	31	Ø4.5	19	0.041
21900612316	3/8"	10	12L	M18×1.5	63	37	33	Ø7	22	0.063
21900815316	1/2"	15	15L	M22×1.5	75	47	44	Ø10	27	0.114
21900818316	1/2"	15	18L	M26×1.5	75	47	44	Ø10	32	0.125
21901018316	5/8"	16	18L	M26×1.5	87	52	52	Ø12	32	0.173
21901222316	3/4"	20	22L	M30×2.0	100	62	62	Ø15	36	0.261
21901628316	1"	25	28L	M36×2.0	125	73	77	Ø19	41	0.465
21902035316	1 1/4"	32	35L	M45×2.0	155	92	100	Ø24	50	0.862
21902442316	1 1/2"	40	42L	M52×2.0	175	111	117	Ø30	60	1.340

Article number: 2190 | 04 | 08 | 316

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection Standard Hose Insert Hose size: 1/4"-1 1/2" Compatible sleeve series 4101, 4102, 4202, 4204, 4300, 4400, 4607, 4608	End 2 — Threaded connection Metric 24° Female Swivel 90° Bend · Light Series Connection: ISO 8434-1 Thread: ISO 724 Tolerance: 6H / ISO 965-1	General product information Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway
---	---	---

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.