


PRODUCT GROUP
2200
Strong Series

MATERIAL
SS316L
Stainless steel

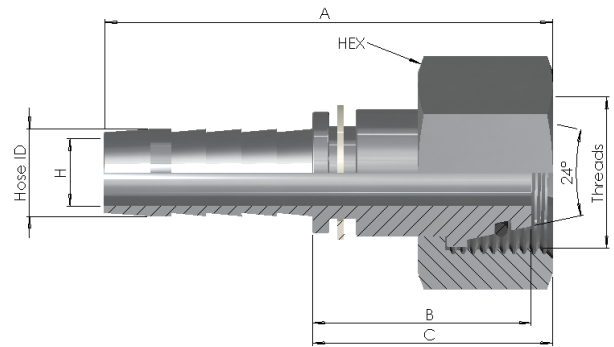

Standard Hose Insert x Metric 24° Female

24° connection • Straight • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
22000408316	1/4"	8	8S	M16×1.5	54	25	27	Ø4.5	19	0.036
22000410316	1/4"	8	10S	M18×1.5	55	25	28	Ø4.5	22	0.043
22000610316	3/8"	10	10S	M18×1.5	58	25	28	Ø7	22	0.052
22000612316	3/8"	10	12S	M20×1.5	62	29	33	Ø7	24	0.064
22000614316	3/8"	10	14S	M22×1.5	64	30	34	Ø7	27	0.092
22000816316	1/2"	15	16S	M24×1.5	67	32	35	Ø10	30	0.115
22001020316	5/8"	16	20S	M30×2.0	71	32	35	Ø12	36	0.175
22001220316	3/4"	20	20S	M30×2.0	76	35	38	Ø15	36	0.208
22001225316	3/4"	20	25S	M36×2.0	80	38	42	Ø15	41	0.258
22001625316	1"	25	25S	M36×2.0	90	38	42	Ø20	41	0.304
22001630316	1"	25	30S	M42×2.0	99	47	51	Ø20	50	0.476
22002038316	1 1/4"	32	38S	M52×2.0	113	52	57	Ø24.5	60	0.738

Article number: 2200 | 04 | 08 | 316

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1 1/4"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Female Swivel
Straight • Strong Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6H / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.