


PRODUCT GROUP
2245
Strong Series

MATERIAL
SS316L
Stainless steel

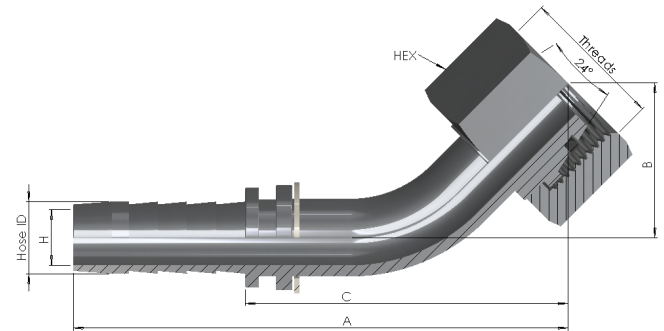

Standard Hose Insert x Metric 24° Female, Elbow 45°

24° connection • 45° Bend • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
22450408316	1/4"	8	8S	M16×1.5	63	17	40	Ø4.5	19	0.036
22450410316	1/4"	8	10S	M18×1.5	63	17	40	Ø4.5	22	0.048
22450612316	3/8"	10	12S	M20×1.5	75	20	45	Ø7	24	0.085
22450614316	3/8"	10	14S	M22×1.5	76	21	46	Ø7	27	0.110
22450816316	1/2"	15	16S	M24×1.5	87	24	56	Ø10	30	0.131
22451020316	5/8"	16	20S	M30×2.0	101	33	67	Ø12	36	0.225
22451220316	3/4"	20	20S	M30×2.0	117	36	79	Ø15	36	0.262
22451225316	3/4"	20	25S	M36×2.0	117	36	79	Ø15	41	0.302
22451625316	1"	25	25S	M36×2.0	143	40	95	Ø19	41	0.420
22451630316	1"	25	30S	M42×2.0	145	42	97	Ø19	50	0.580
22452038316	1 1/4"	32	38S	M52×2.0	173	49	118	Ø24	60	0.790

Article number: **2245 | 04 | 08 | 316**

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1 1/4"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Female Swivel
45° Bend • Strong Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6H / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.