


PRODUCT GROUP
2290
Strong Series

MATERIAL
SS316L
Stainless steel

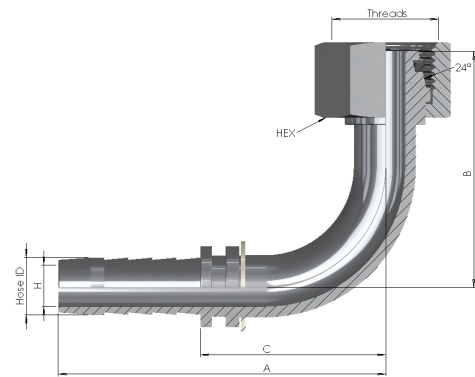

Standard Hose Insert × Metric 24° Female, Elbow 90°

24° connection • 90° Bend • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
22900408316	1/4"	8	8S	M16×1.5	54	31	31	Ø4.5	19	0.041
22900410316	1/4"	8	10S	M18×1.5	54	31	31	Ø4.5	22	0.052
22900612316	3/8"	10	12S	M20×1.5	63	37	33	Ø7	24	0.069
22900614316	3/8"	10	14S	M22×1.5	63	38	33	Ø7	27	0.118
22900816316	1/2"	15	16S	M24×1.5	75	47	44	Ø10	30	0.140
22901020316	5/8"	16	20S	M30×2.0	87	55	52	Ø12	36	0.240
22901220316	3/4"	20	20S	M30×2.0	100	65	62	Ø15	36	0.283
22901225316	3/4"	20	25S	M36×2.0	100	66	62	Ø15	41	0.380
22901625316	1"	25	25S	M36×2.0	125	76	77	Ø19	41	0.484
22901630316	1"	25	30S	M42×2.0	125	78	77	Ø19	50	0.610
22902038316	1 1/4"	32	38S	M52×2.0	155	100	100	Ø24	60	0.890

Article number: **2290 | 04 | 08 | 316**

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1 1/4"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Female Swivel
90° Bend • Strong Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6H / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.