


PRODUCT GROUP
2300
Light Series

MATERIAL
SS316L
Stainless steel

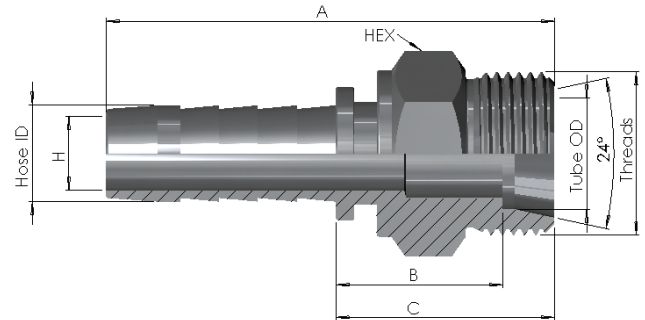

Standard Hose Insert x Metric 24° Male

24° connection • Straight • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
23000408316	1/4"	8	8L	M14×1.5	52	18	25	Ø4.5	17	0.021
23000410316	1/4"	8	10L	M16×1.5	53	19	26	Ø4.5	17	0.029
23000612316	3/8"	10	12L	M18×1.5	57	20	27	Ø7	19	0.041
23000815316	1/2"	15	15L	M22×1.5	61	23	30	Ø10	24	0.080
23000818316	1/2"	15	18L	M26×1.5	61	23.5	31	Ø10	27	0.090
23001018316	5/8"	16	18L	M26×1.5	65	23.5	31	Ø12	27	0.115
23001222316	3/4"	20	22L	M30×2.0	73	27.5	35	Ø15	32	0.157
23001628316	1"	25	28L	M36×2.0	85	29.5	37	Ø20	41	0.255

Article number: **2300 | 04 | 08 | 316**

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Male
Straight · Light Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6g / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.