


PRODUCT GROUP
2400
Strong Series

MATERIAL
SS316L
Stainless steel

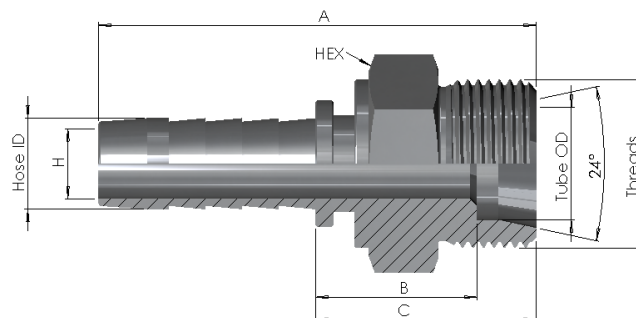

Standard Hose Insert x Metric 24° Male

24° connection • Straight • Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Tube size	Threads	A	B	C	H	Hex	Weight (kg)
24000408316	1/4"	8	8S	M16×1.5	54	20	27	Ø4.5	17	0.034
24000410316	1/4"	8	10S	M18×1.5	54	19.5	27	Ø4.5	19	0.042
24000612316	3/8"	10	12S	M20×1.5	58	21	28	Ø7	22	0.056
24000614316	3/8"	10	14S	M22×1.5	60	22	30	Ø7	24	0.071
24000816316	1/2"	15	16S	M24×1.5	63	23.5	32	Ø10	27	0.094
24001020316	5/8"	16	20S	M30×2.0	69	24.5	35	Ø12	32	0.147
24001220316	3/4"	20	20S	M30×2.0	75	26.5	37	Ø15	32	0.159
24001225316	3/4"	20	25S	M36×2.0	77	27	39	Ø15	41	0.230
24001625316	1"	25	25S	M36×2.0	89	29	41	Ø20	41	0.272
24001630316	1"	25	30S	M42×2.0	91	29.5	43	Ø20	46	0.365

Article number: 2400 | 04 | 08 | 316

Series | Hose size | Metric tube size | Material

Product specifications

End 1 — Hose connection

Standard Hose Insert
Hose size: 1/4"-1"
Compatible sleeve series
4101, 4102, 4202, 4204,
4300, 4400, 4607, 4608

End 2 — Threaded connection

Metric 24° Male
Straight · Strong Series
Connection: ISO 8434-1
Thread: ISO 724
Tolerance: 6g / ISO 965-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.