


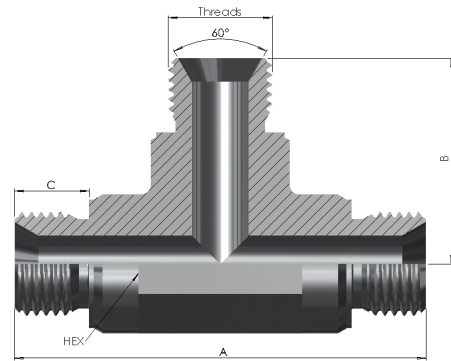

BSPP Male 60° Cone, Tee

10,000 PSI / 689 bar / 68.9 MPa*

Dimensions & variants

Dimensions in mm

Item number	BSPP	A	B	C	Hex	Weight (kg)
5530040431610K	G 1/4"	53	25	11	20	0.140
5530060631610K	G 3/8"	63	31.5	12.5	23	0.210
5530080831610K	G 1/2"	74	37	15	28	0.335
5530121231610K	G 3/4"	94	47	17	34	0.550
5530161631610K	G 1"	108	54	19	44	

Article number: 5530 | 04 | 04 | 316 | 10K

Series | BSPP thread code | BSPP thread code | Material | Pressure class

Product specifications

Ends 1-3 — BSPP Male	Configuration	General product information
BSPP Male 60° internal cone or bonded seal Connection: ISO 8434-6 Connection: ISO 1179-2 Thread: ISO 228-1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 10,000 PSI* 689 bar / 68.9 MPa* HS code: 73079900 Country of origin: Norway

Technical info

BSPP ends: Parallel G threads to ISO 228-1. Each connection may be sealed either on the 60° internal cone to ISO 8434-6, or against the external shoulder using an elastomeric bonded seal to ISO 1179-2.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.