


PRODUCT GROUP
6300
15K

MATERIAL
SS316L
Stainless steel

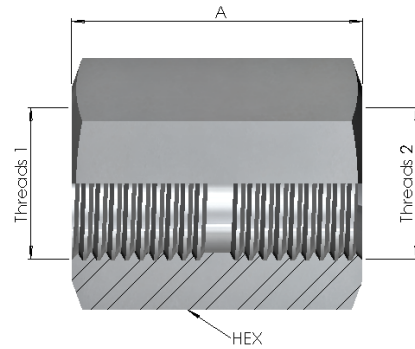

BSPP Female Fixed x BSPP Female Fixed

15,000 PSI / 1,034 bar / 103.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	BSPP Female Fixed 1	BSPP Female Fixed 2	A	Hex	Weight (kg)
6300040431615K	G 1/4"	G 1/4"	30	24	0.089
6300040631615K	G 1/4"	G 3/8"	34	27	0.126
6300040831615K	G 1/4"	G 1/2"	37	36	0.259
6300060631615K	G 3/8"	G 3/8"	37	27	0.126
6300060831615K	G 3/8"	G 1/2"	40	36	0.272
6300080831615K	G 1/2"	G 1/2"	40	36	0.253

Article number: 6300 | 04 | 06 | 316 | 15K

Series | BSPP Female Fixed thread code 1 | BSPP Female Fixed thread code 2 | Material | Pressure class

Product specifications

End 1 — BSPP Female Fixed

BSPP Female Fixed
ISO 1179-2 sealing interface
Connection: ISO 1179-2
Thread: ISO 228-1

End 2 — BSPP Female Fixed

BSPP Female Fixed
ISO 1179-2 sealing interface
Connection: ISO 1179-2
Thread: ISO 228-1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 15,000 PSI*
1,034 bar / 103.4 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

BSPP Female Fixed side 1: Parallel G thread to ISO 228-1. BSPP Female Fixed side 2: Parallel G thread to ISO 228-1.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.