




BSPP Female Fixed, Tee

10,000 PSI / 689 bar / 68.9 MPa\*

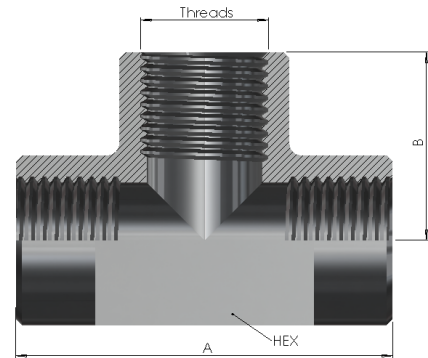

## Dimensions & variants

Dimensions in mm

| Item number    | BSPP Female Fixed | A  | B  | Hex | Weight (kg) |
|----------------|-------------------|----|----|-----|-------------|
| 6330161631610K | G 1"              | 98 | 49 | 52  | 1.400       |

**Article number: 6330 | 16 | 16 | 316 | 10K**

Series | BSPP Female Fixed thread code 1 | BSPP Female Fixed thread code 2 |  
Material | Pressure class

## Product specifications

| Ends 1-3 — BSPP Female Fixed                                                                     | Configuration                                        | General product information                                                                                                                             |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| BSPP Female Fixed<br>ISO 1179-2 sealing interface<br>Connection: ISO 1179-2<br>Thread: ISO 228-1 | Tee<br>Three threaded ports<br>Sizes: see dimensions | Material: AISI 316L<br>EN 1.4404 / UNS S31603<br>Working pressure: 10,000 PSI*<br>689 bar / 68.9 MPa*<br>HS code: 73079900<br>Country of origin: Norway |

## Technical info

BSPP Female Fixed ends: Parallel G threads to ISO 228-1 with sealing interfaces to ISO 1179-2. Equal tee configuration with identical connection size on all three ports.

\* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.