


PRODUCT GROUP
6330
15K

MATERIAL
SS316L
Stainless steel

BSPP Female Fixed, Tee

15,000 PSI / 1,034 bar / 103.4 MPa*

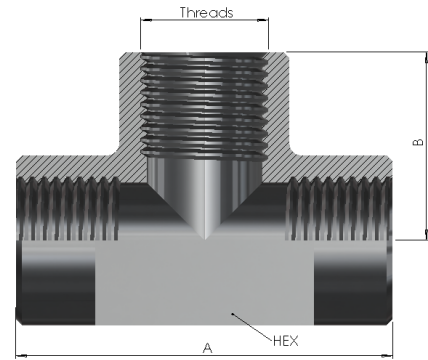

Dimensions & variants

Dimensions in mm

Item number	BSPP Female Fixed	A	B	Hex	Weight (kg)
6330040431615K	G 1/4"	52	26	23	0.183
6330060631615K	G 3/8"	62	31	28	0.278
6330080831615K	G 1/2"	74	37	34	0.492
6330121231615K	G 3/4"	84	42	44	0.912

Article number: 6330 | 04 | 04 | 316 | 15K

Series | BSPP Female Fixed thread code 1 | BSPP Female Fixed thread code 2 |
Material | Pressure class

Product specifications

Ends 1-3 — BSPP Female Fixed

BSPP Female Fixed
ISO 1179-2 sealing interface
Connection: ISO 1179-2
Thread: ISO 228-1

Configuration

Tee
Three threaded ports
Sizes: see dimensions

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 15,000 PSI*
1,034 bar / 103.4 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

BSPP Female Fixed ends: Parallel G threads to ISO 228-1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.