




BSPP Female Fixed, Tee

6,000 PSI / 414 bar / 41.4 MPa*

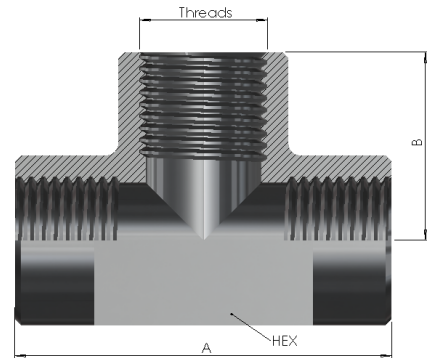

Dimensions & variants

Dimensions in mm

Item number	BSPP Female Fixed	A	B	Hex	Weight (kg)
63300202316	G 1/8"	44	22	16	0.064
63300404316	G 1/4"	48	24	20	0.098
63300606316	G 3/8"	52	26	23	0.124
63300808316	G 1/2"	62	31	28	0.199
63301212316	G 3/4"	74	37	34	0.324
63301616316	G 1"	84	42	44	0.641
63302020316	G 1 1/4"	98	49	52	1.270
63302424316	G 1 1/2"	120	60	62	1.774

Article number: 6330 | 04 | 04 | 316 | 6K

Series | BSPP Female Fixed thread code 1 | BSPP Female Fixed thread code 2 | Material | Pressure class

Product specifications

Ends 1-3 — BSPP Female Fixed	Configuration	General product information
BSPP Female Fixed ISO 1179-2 sealing interface Connection: ISO 1179-2 Thread: ISO 228-1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

BSPP Female Fixed ends: Parallel G threads to ISO 228-1 with sealing interfaces to ISO 1179-2. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.