


PRODUCT GROUP
63W
6K

MATERIAL
SS316L
Stainless steel

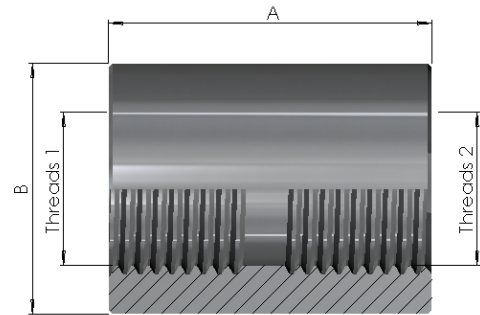

BSPP Female Fixed/Female Fixed Weld Collar

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	BSPP Female Fixed 1	BSPP Female Fixed 2	A	B (Ø)	Weight (kg)
63W0404316	G 1/4"	G 1/4"	30	20	0.044
63W0606316	G 3/8"	G 3/8"	37	23	0.063
63W0808316	G 1/2"	G 1/2"	40	31	0.140
63W1212316	G 3/4"	G 3/4"	45	38	0.224
63W1616316	G 1"	G 1"	50	48	0.406
63W2020316	G 1 1/4"	G 1 1/4"	55	55	0.466
63W2424316	G 1 1/2"	G 1 1/2"	58	60	0.542
63W3232316	G 2"	G 2"	64	80	1.196

Article number: **63W | 04 | 04 | 316 | 6K**

Series | BSPP Female Fixed thread code 1 | BSPP Female Fixed thread code 2 | Material | Pressure class

Product specifications

End 1 — BSPP Female Fixed	End 2 — BSPP Female Fixed	General product information
BSPP Female Fixed ISO 1179-2 sealing interface Connection: ISO 1179-2 Thread: ISO 228-1	BSPP Female Fixed ISO 1179-2 sealing interface Connection: ISO 1179-2 Thread: ISO 228-1	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

BSPP Female Fixed sides: Parallel G threads to ISO 228-1 with sealing interfaces to ISO 1179-2. Weld collar configuration with identical connection size on both ends.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.