




BSPP Female Swivel 60° Cone, Tee

10,000 PSI / 689 bar / 68.9 MPa*

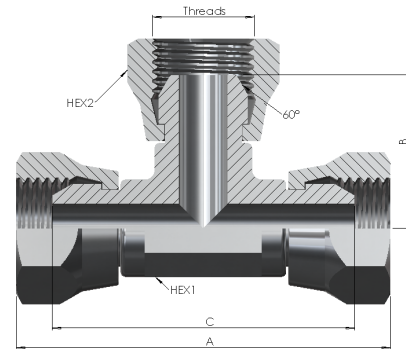

Dimensions & variants

Dimensions in mm

Item number	BSPP Female	A	B	C	Hex1	Hex2	Weight (kg)
6430040431610K	G 1/4"	66	26.5	53	16	19	0.113
6430060631610K	G 3/8"	66	26.5	53	16	22	0.154
6430080831610K	G 1/2"	77	31.5	63	20	30	0.381
6430121231610K	G 3/4"	103	41.5	83	28	36	0.650
6430161631610K	G 1"	114	47	94	34	46	1.080

Article number: 6430 | 04 | 04 | 316 | 10K

Series | BSPP female thread code 1 | BSPP female thread code 2 | Material | Pressure class

Product specifications

Ends 1-3 — BSPP Female Swivel	Configuration	General product information
BSPP Female Swivel 60° cone Connection: ISO 8434-6 Thread: ISO 228-1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 10,000 PSI* 689 bar / 68.9 MPa* HS code: 73079900 Country of origin: Norway

Technical info

BSPP female swivel ends: 60° cone swivel connections to ISO 8434-6 with parallel G threads to ISO 228-1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.