


PRODUCT GROUP
6430
6K

MATERIAL
SS316L
Stainless steel

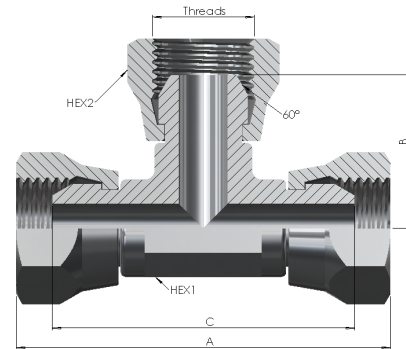

BSPP Female Swivel 60° Cone, Tee

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	BSPP Female	A	B	C	Hex1	Hex2	Weight (kg)
64300404316	G 1/4"	66	26.5	53	16	19	0.113
64300606316	G 3/8"	66	26.5	53	16	22	0.154
64300808316	G 1/2"	77	31.5	63	20	27	0.260
64301212316	G 3/4"	103	41.5	83	28	32	0.475
64301616316	G 1"	114	47	94	34	41	0.776
64302020316	G 1 1/4"	130	52.5	105	44	50	
64302424316	G 1 1/2"	146	60	120	52	55	
64303232316	G 2"	174	71	142	62	70	

Article number: 6430 | 04 | 04 | 316 | 6K

Series | BSPP female thread code 1 | BSPP female thread code 2 | Material | Pressure class

Product specifications

Ends 1-3 — BSPP Female Swivel	Configuration	General product information
BSPP Female Swivel 60° cone Connection: ISO 8434-6 Thread: ISO 228-1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

BSPP female swivel ends: 60° cone swivel connections to ISO 8434-6 with parallel G threads to ISO 228-1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.