


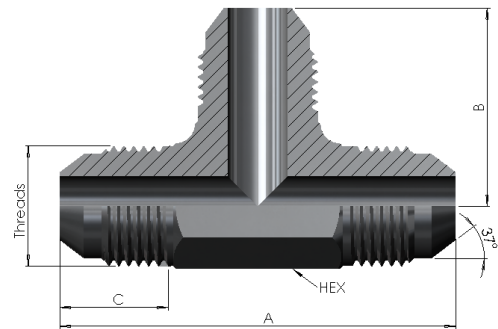

JIC 37° Male, Tee

10,000 PSI / 689 bar / 68.9 MPa*

Dimensions & variants

Dimensions in mm

Item number	JIC	Dash	A	B	C	Hex	Weight (kg)
8330070731610K	7/16"-20UN	-04	53	26.5	14.5	16	0.062
8330080831610K	1/2"-20UN	-05	53	26.5	14.5	16	0.060
8330090931610K	9/16"-18UN	-06	53	26.5	14.5	16	0.071
8330121231610K	3/4"-16UN	-08	63	31.5	16.5	20	0.129
8330141431610K	7/8"-14UN	-10	73	36.5	20	23	0.197
8330171731610K	1 1/16"-12UN	-12	83	41.5	22	28	0.318
8330212131610K	1 5/16"-12UN	-16	94	47	23	34	0.560

Article number: 8330 | 12 | 12 | 316 | 10K

Series | JIC thread code | JIC thread code | Material | Pressure class

Product specifications

Ends 1-3 — JIC Male	Configuration	General product information
JIC Male 37° flare Connection: ISO 8434-2 Thread: ASME B1.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 10,000 PSI* 689 bar / 68.9 MPa* HS code: 73079900 Country of origin: Norway

Technical info

JIC ends: 37° flare connections to ISO 8434-2 with UN/UNF threads to ASME B1.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.