


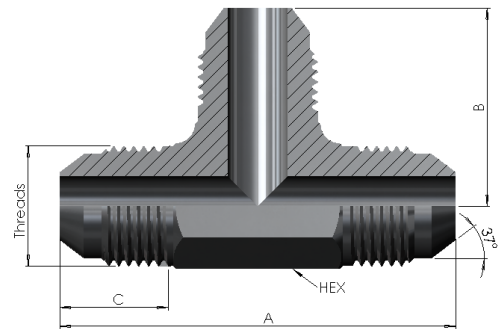

JIC 37° Male, Tee

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	JIC	Dash	A	B	C	Hex	Weight (kg)
83300707316	7/16"-20UN	-04	53	26.5	14.5	16	0.062
83300808316	1/2"-20UN	-05	53	26.5	14.5	16	0.060
83300909316	9/16"-18UN	-06	53	26.5	14.5	16	0.071
83301212316	3/4"-16UN	-08	63	31.5	16.5	20	0.129
83301414316	7/8"-14UN	-10	73	36.5	20	23	0.197
83301717316	1 1/16"-12UN	-12	83	41.5	22	28	0.318
83302121316	1 5/16"-12UN	-16	94	47	23	34	0.530

Article number: 8330 | 12 | 12 | 316 | 6K

Series | JIC thread code | JIC thread code | Material | Pressure class

Product specifications

Ends 1-3 — JIC Male	Configuration	General product information
JIC Male 37° flare Connection: ISO 8434-2 Thread: ASME B1.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

JIC ends: 37° flare connections to ISO 8434-2 with UN/UNF threads to ASME B1.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.