


PRODUCT GROUP
8630
10K

MATERIAL
SS316L
Stainless steel

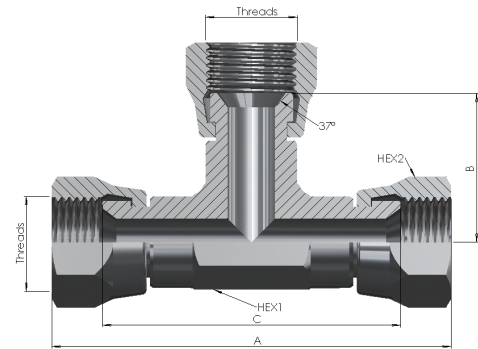

JIC 37° Female Swivel, Tee

10,000 PSI / 689 bar / 68.9 MPa*

Dimensions & variants

Dimensions in mm

Item number	JIC Female	Dash	A	B	C	Hex1	Hex2	Weight (kg)
8630070731610K	7/16"-20UN	-04	70	26.5	53	16	17	0.126
8630090931610K	9/16"-18UN	-06	71	26.5	53	16	19	0.135
8630121231610K	3/4"-16UN	-08	83	31.5	63	20	27	340.000
8630141431610K	7/8"-14UN	-10	97	36.5	73	23	32	
8630171731610K	1 1/16"-12UN	-12	109	41.5	83	28	36	
8630212131610K	1 5/16"-12UN	-16	124	47	94	34	46	

Article number: 8630 | 12 | 12 | 316 | 10K

Series | JIC thread code 1 | JIC thread code 2 | Material | Pressure class

Product specifications

Ends 1-3 — JIC Female Swivel	Configuration	General product information
JIC Female Swivel 37° flare Connection: ISO 8434-2 Thread: ASME B1.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 10,000 PSI* 689 bar / 68.9 MPa* HS code: 73079900 Country of origin: Norway

Technical info

JIC female swivel ends: 37° flare swivel connections to ISO 8434-2 with UN/UNF threads to ASME B1.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.