


PRODUCT GROUP
8630
6K

MATERIAL
SS316L
Stainless steel

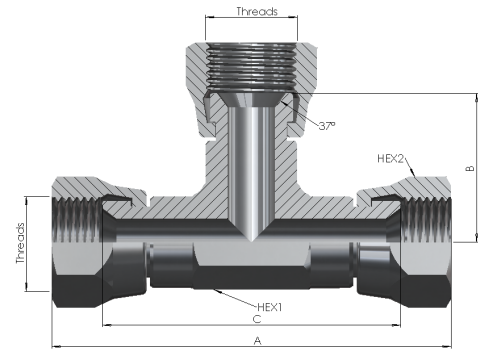

JIC 37° Female Swivel, Tee

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	JIC Female	Dash	A	B	C	Hex1	Hex2	Weight (kg)
86300707316	7/16"-20UN	-04	70	26.5	53	16	17	0.126
86300909316	9/16"-18UN	-06	71	26.5	53	16	19	0.135
86301212316	3/4"-16UN	-08	83	31.5	63	20	24	0.223
86301414316	7/8"-14UN	-10	97	36.5	73	23	27	
86301717316	1 1/16"-12UN	-12	109	41.5	83	28	32	
86302121316	1 5/16"-12UN	-16	124	47	94	34	41	0.852
86302626316	1 5/8"-12UN	-20	138	52.5	105	44	50	
86303030316	1 7/8"-12UN	-24	156	60	120	52	55	
86304040316	2 1/2"-12UN	-32	188	71	142	62	75	

Article number: 8630 | 12 | 12 | 316 | 6K

Series | JIC thread code 1 | JIC thread code 2 | Material | Pressure class

Product specifications

Ends 1-3 — JIC Female Swivel	Configuration	General product information
JIC Female Swivel 37° flare Connection: ISO 8434-2 Thread: ASME B1.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

JIC female swivel ends: 37° flare swivel connections to ISO 8434-2 with UN/UNF threads to ASME B1.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.