




JIC 37° Female Swivel, Elbow 90°

10,000 PSI / 689 bar / 68.9 MPa*

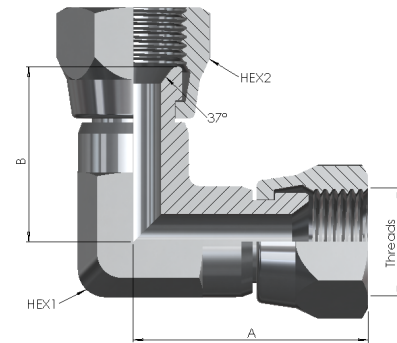

Dimensions & variants

Dimensions in mm

Item number	JIC Female 1	Dash 1	JIC Female 2	Dash 2	A	B	Hex1	Hex2	Weight (kg)
8690070731610K	7/16"-20UN	-04	7/16"-20UN	-04	35	26.5	16	17	0.092
8690090931610K	9/16"-18UN	-06	9/16"-18UN	-06	35.5	26.5	16	19	0.100
8690121231610K	3/4"-16UN	-08	3/4"-16UN	-08	41.5	31.5	20	27	0.244
8690141431610K	7/8"-14UN	-10	7/8"-14UN	-10	48.5	36.5	23	32	
8690171731610K	1 1/16"-12UN	-12	1 1/16"-12UN	-12	54.5	41.5	28	36	
8690212131610K	1 5/16"-12UN	-16	1 5/16"-12UN	-16	62	47	34	46	

Article number: 8690 | 12 | 12 | 316 | 10K

Series | JIC female thread code 1 | JIC female thread code 2 | Material | Pressure class

Product specifications

End 1 — JIC Female Swivel	End 2 — JIC Female Swivel	General product information
JIC Female Swivel 37° flare Connection: ISO 8434-2 Thread: ASME B1.1	JIC Female Swivel 37° flare Connection: ISO 8434-2 Thread: ASME B1.1	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 10,000 PSI* 689 bar / 68.9 MPa* HS code: 73079900 Country of origin: Norway

Technical info

JIC female swivel ends: 37° flare swivel connections to ISO 8434-2 with UN/UNF threads to ASME B1.1. 90° elbow configuration with identical connection size on both ends.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.