


PRODUCT GROUP
9330
6K

MATERIAL
SS316L
Stainless steel

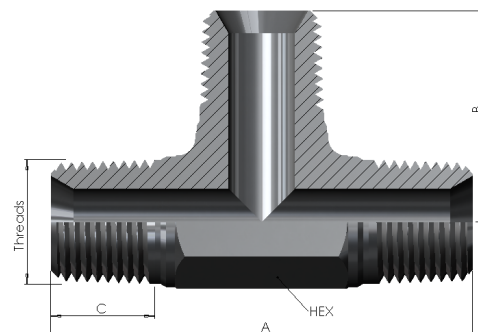

NPT Male, Tee

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	NPT	A	B	C	Hex	Weight (kg)
93300404316	1/4"NPT	53	26.5	14	16	0.071
93300606316	3/8"NPT	63	31.5	15	20	0.130
93300808316	1/2"NPT	73	36.5	19	23	0.199
93301212316	3/4"NPT	83	41.5	20	28	0.341
93301616316	1"NPT	94	47	24	34	0.526
93302020316	1 1/4"NPT	105	52.5	24.5	44	
93302424316	1 1/2"NPT	120	60	25.5	52	
93303232316	2"NPT	142	71	33	62	

Article number: 9330 | 04 | 04 | 316 | 6K

Series | NPT thread code 1 | NPT thread code 2 | Material | Pressure class

Product specifications

Ends 1-3 — NPT Male	Configuration	General product information
NPT Male Tapered pipe thread Thread: ASME B1.20.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

NPT ends: Tapered pipe threads to ASME B1.20.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.