


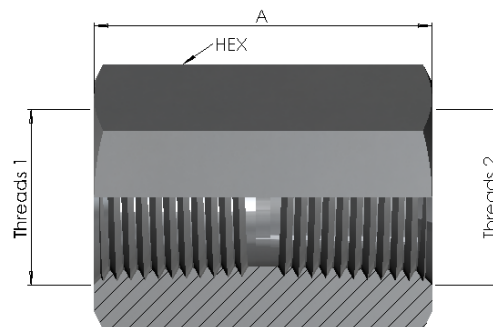

NPT Female × NPT Female

15,000 PSI / 1,034 bar / 103.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	NPT Female 1	NPT Female 2	A	Hex	Weight (kg)
9500040431615K	1/4"NPT	1/4"NPT	34	24	0.103
9500040631615K	1/4"NPT	3/8"NPT	36	27	0.136
9500040831615K	1/4"NPT	1/2"NPT	42	36	
9500060631615K	3/8"NPT	3/8"NPT	36	27	0.125
9500060831615K	3/8"NPT	1/2"NPT	42	36	0.292
9500080831615K	1/2"NPT	1/2"NPT	44	36	0.286

↓ Continued on page 2

9500 15K

NPT Female × NPT Female

15,000 PSI / 1,034 bar / 103.4 MPa*

Dimensions & variants — continued

Dimensions in mm

Item number	NPT Female 1	NPT Female 2	A	Hex	Weight (kg)
9500081231615K	1/2"NPT	3/4"NPT	48	50	0.667
9500081631615K	1/2"NPT	1"NPT	53	55	
9500121231615K	3/4"NPT	3/4"NPT	46	50	0.612
9500121631615K	3/4"NPT	1"NPT	54	55	
9500161631615K	1"NPT	1"NPT	54	55	

Article number: 9500 | 08 | 12 | 316 | 15K

Series | NPT female thread code 1 | NPT female thread code 2 | Material |
Pressure class

Product specifications

End 1 — NPT Female	End 2 — NPT Female	General product information
NPT Female Tapered pipe thread Thread: ASME B1.20.1	NPT Female Tapered pipe thread Thread: ASME B1.20.1	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 15,000 PSI* 1,034 bar / 103.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

NPT female side 1: Tapered pipe thread to ASME B1.20.1. NPT female side 2: Tapered pipe thread to ASME B1.20.1.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.