


PRODUCT GROUP
9530
10K

MATERIAL
SS316L
Stainless steel

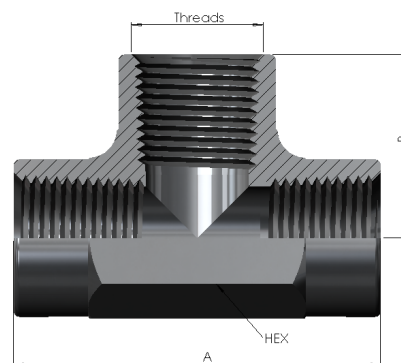

NPT Female, Tee

10,000 PSI / 689 bar / 68.9 MPa*

Dimensions & variants

Dimensions in mm

Item number	NPT Female	A	B	Hex
9530161631610K	1"NPT	100	50	52

Article number: 9530 | 16 | 16 | 316 | 10K

Series | NPT female thread code 1 | NPT female thread code 2 |

Material | Pressure class

Product specifications

Ends 1-3 — NPT Female

NPT Female
Tapered pipe thread
Thread: ASME B1.20.1

Configuration

Tee
Three threaded ports
Sizes: see dimensions

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 10,000 PSI*
689 bar / 68.9 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

NPT female ends: Tapered pipe threads to ASME B1.20.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.