




NPT Female, Tee

15,000 PSI / 1,034 bar / 103.4 MPa*

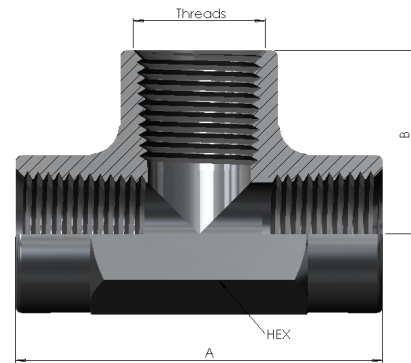

Dimensions & variants

Dimensions in mm

Item number	NPT Female	A	B	Hex
9530040431615K	1/4"NPT	53	26.5	23
9530060631615K	3/8"NPT	64	32	28
9530080831615K	1/2"NPT	74	37	34
9530121231615K	3/4"NPT	86	43	44

Article number: 9530 | 08 | 08 | 316 | 15K

Series | NPT female thread code 1 | NPT female thread code 2 |
Material | Pressure class

Product specifications

Ends 1-3 — NPT Female	Configuration	General product information
NPT Female Tapered pipe thread Thread: ASME B1.20.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 15,000 PSI* 1,034 bar / 103.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

NPT female ends: Tapered pipe threads to ASME B1.20.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.