


PRODUCT GROUP
9530
6K

MATERIAL
SS316L
Stainless steel

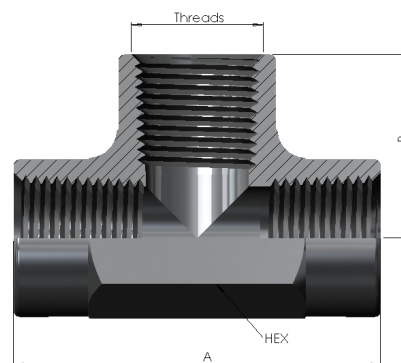

NPT Female, Tee

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	NPT Female	A	B	Hex	Weight (kg)
95300202316	1/8"NPT	34	17	16	
95300404316	1/4"NPT	44	22	20	
95300606316	3/8"NPT	53	26.5	23	
95300808316	1/2"NPT	64	32	28	
95301212316	3/4"NPT	74	37	34	
95301616316	1"NPT	86	43	44	0.730
95302020316	1 1/4"NPT	100	50	52	
95302424316	1 1/2"NPT	112	56	62	

Article number: 9530 | 04 | 04 | 316 | 6K

Series | NPT female thread code 1 | NPT female thread code 2 |
Material | Pressure class

Product specifications

Ends 1-3 — NPT Female	Configuration	General product information
NPT Female Tapered pipe thread Thread: ASME B1.20.1	Tee Three threaded ports Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 6,000 PSI* 414 bar / 41.4 MPa* HS code: 73079900 Country of origin: Norway

Technical info

NPT female ends: Tapered pipe threads to ASME B1.20.1. Equal tee configuration with identical connection size on all three ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.