


PRODUCT GROUP

9540
15K

MATERIAL

SS316L

Stainless steel

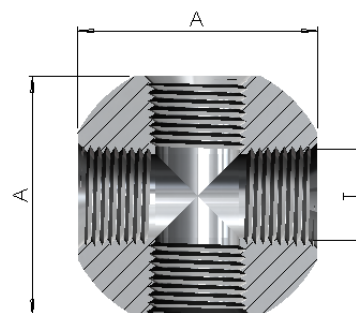

NPT Female, Cross

15,000 PSI / 1,034 bar / 103.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	NPT Female	A
9540040431615K	1/4"NPT	36
9540060631615K	3/8"NPT	45
9540080831615K	1/2"NPT	53
9540121231615K	3/4"NPT	60

Article number: 9540 | 08 | 08 | 316 | 15K

Series | NPT female thread code 1 | NPT female thread code 2 | Material | Pressure class

Product specifications

Ends 1-4 — NPT Female

NPT Female
Tapered pipe thread
Thread: ASME B1.20.1

Configuration

Cross
Four threaded ports
Sizes: see dimensions

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 15,000 PSI*
1,034 bar / 103.4 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

NPT female ends: Tapered pipe threads to ASME B1.20.1. Cross configuration with identical connection size on all four ports.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.