


PRODUCT GROUP
95W
6K

MATERIAL
SS316L
Stainless steel

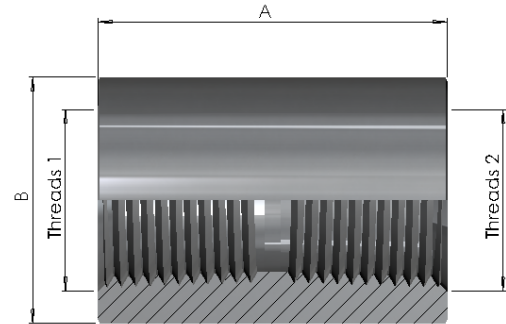

NPT Female/Female Weld Collar

6,000 PSI / 414 bar / 41.4 MPa*

Dimensions & variants

Dimensions in mm

Item number	NPT Female 1	NPT Female 2	A	B (Ø)
95W0404316	1/4"NPT	1/4"NPT	34	20
95W0606316	3/8"NPT	3/8"NPT	36	23
95W0808316	1/2"NPT	1/2"NPT	44	31
95W1212316	3/4"NPT	3/4"NPT	46	36
95W1616316	1"NPT	1"NPT	54	48
95W2020316	1 1/4"NPT	1 1/4"NPT	54	55
95W2424316	1 1/2"NPT	1 1/2"NPT	57	60
95W3232316	2"NPT	2"NPT	72	80

Article number: **95W | 04 | 04 | 316 | 6K**

Series | NPT female thread code 1 | NPT female thread code 2 | Material |
Pressure class

Product specifications

End 1 — NPT Female

NPT Female
Tapered pipe thread
Thread: ASME B1.20.1

End 2 — NPT Female

NPT Female
Tapered pipe thread
Thread: ASME B1.20.1

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 6,000 PSI*
414 bar / 41.4 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

NPT female sides: Tapered pipe threads to ASME B1.20.1. Weld collar configuration with identical connection size on both ends.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.