


PRODUCT GROUP
HMF
60K

MATERIAL
SS316L
Stainless steel

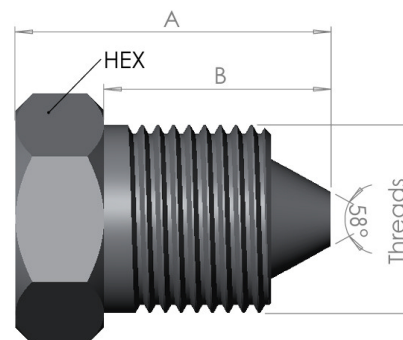

High Pressure Male Fixed Plug

60,000 PSI / 4,137 bar / 413.7 MPa*

Dimensions & variants

Dimensions in mm

Item number	HP Size	HP Thread	A	B	Hex
HMF04316	1/4" (04)	9/16"-18UN	25	16	17
HMF06316	3/8" (06)	3/4"-16UN	32	23	22
HMF09316	9/16" (09)	1 1/8"-12UN	64	27	30

Article number: HMF | 04 | 316

Series | HP size code | Material

Product specifications

Connection — High Pressure Male Fixed

High Pressure Male Fixed
58° male cone / 60° female cone seat
High Pressure cone-and-thread
HP size and thread: see dimensions

Configuration

Plug
One sealing connection
Sizes: see dimensions

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 60,000 PSI*
4,137 bar / 413.7 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

High Pressure Male Fixed Plug. Sizes are specified in the table.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.