


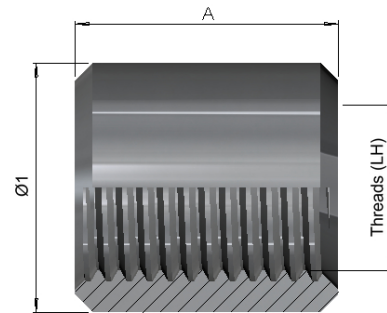

High Pressure Collar

60,000 PSI / 4,137 bar / 413.7 MPa*

Dimensions & variants

Dimensions in mm

Item number	HP Size	HP Thread (LH)	A	Ø1
HP04C316	1/4" (04)	1/4"-28UN	9.5	9.6
HP06C316	3/8" (06)	3/8"-24UN	13.5	12.8
HP09C316	9/16" (09)	9/16"-18UN	16	20.6

Article number: HP | 04 | C | 316

Series | HP size code | Collar | Material

Product specifications

Component — Collar	Assembly	General product information
High Pressure collar Left-hand thread (LH) HP size: see dimensions	High Pressure cone-and-thread Sizes: see dimensions	Material: AISI 316L EN 1.4404 / UNS S31603 Working pressure: 60,000 PSI* 4,137 bar / 413.7 MPa* HS code: 73079900 Country of origin: Norway

Technical info

Left-hand thread (LH) as specified in the table. Dimensionally compatible with the established 60,000 psi High Pressure cone-and-thread connection geometry.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.