


PRODUCT GROUP

MF
20K

MATERIAL

SS316L

Stainless steel

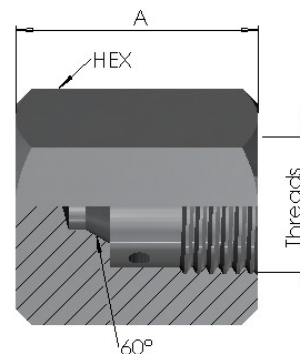

Medium Pressure Female Cap

20,000 PSI / 1,379 bar / 137.9 MPa*

Dimensions & variants

Dimensions in mm

Item number	MP Size	MP Thread	A	Hex
MF04316	1/4" (04)	7/16"-20UN	20	19
MF06316	3/8" (06)	9/16"-18UN	26	22
MF09316	9/16" (09)	13/16"-16UN	30	27
MF12316	3/4" (12)	3/4"-14NPSM	38	36
MF16316	1" (16)	1 3/8"-12UN	50	46
MF24316	1 1/2" (24)	1 7/8"-12UN	66	60

Article number: MF | 04 | 316

Series | MP size code | Material

Product specifications

Connection — Medium Pressure Female

Medium Pressure Female
60° female cone seat
Medium Pressure cone-and-thread
MP size and thread: see dimensions

Configuration

Cap
One sealing connection
Sizes: see dimensions

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 20,000 PSI*
1,379 bar / 137.9 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

Medium Pressure female cap. Size and thread are specified in the table.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.