


PRODUCT GROUP

**MP-GAV
20K**

MATERIAL

SS316L

Stainless steel

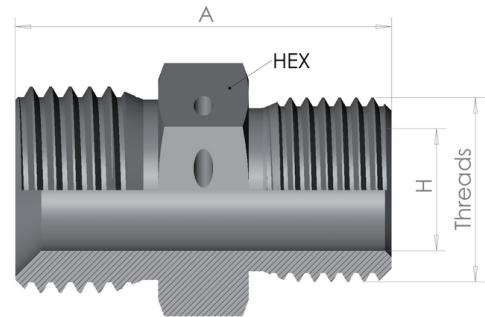

Medium Pressure Gland Anti-Vibration

20,000 PSI / 1,379 bar / 137.9 MPa*

Dimensions & variants

Dimensions in mm

Item number	MP Size	Thread	A	H	Hex
MP04GAV316	1/4" (04)	7/16"-20UN	30	6.5	14
MP06GAV316	3/8" (06)	9/16"-18UN	38	9.6	17
MP09GAV316	9/16" (09)	13/16"-16UN	42	14.4	24
MP12GAV316	3/4" (12)	3/4"-14NPSM	48	19.2	27
MP16GAV316	1" (16)	1 3/8"-12UN	75	26	36
MP24GAV316	1 1/2" (24)	1 7/8"-12UN	90	38.2	50

Article number: MP | 04 | GAV | 316

Series | MP size code | Anti-vibration gland | Material

Product specifications

Component — Anti-vibration gland

Medium Pressure anti-vibration gland
Thread: see dimensions
MP size: see dimensions

Assembly

Medium Pressure cone-and-thread
For use with MP-NAV and MP-SAV

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 20,000 PSI*
1,379 bar / 137.9 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

For use with MP-NAV and MP-SAV. Dimensionally compatible with the established 20,000 psi Medium Pressure cone-and-thread connection geometry.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.