


PRODUCT GROUP

**MP-SAV
20K**

MATERIAL

SS316L

Stainless steel

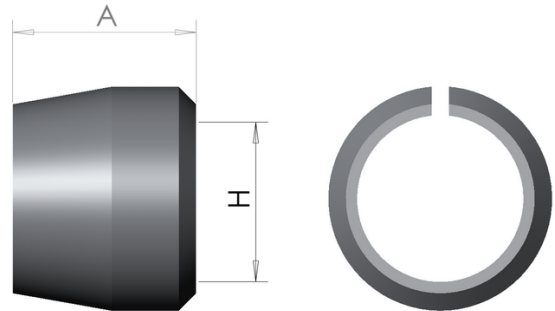

Medium Pressure Sleeve Anti-Vibration

20,000 PSI / 1,379 bar / 137.9 MPa*

Dimensions

Dimensions in mm

Item number	MP Size	A	H
MP04SAV316	1/4" (04)	8.5	6.5
MP06SAV316	3/8" (06)	10.5	9.6
MP09SAV316	9/16" (09)	10.5	14.4
MP12SAV316	3/4" (12)	13.8	19.2
MP16SAV316	1" (16)	14.3	26
MP24SAV316	1 1/2" (24)	20.6	38.2

Article number: MP | 04 | SAV | 316

Series | MP size code | Anti-vibration sleeve |
Material

Product specifications

Component — Anti-vibration sleeve

Medium Pressure anti-vibration sleeve
Sizes: see dimensions
MP size: see dimensions

Assembly

Medium Pressure cone-and-thread
For use with MP-GAV and MP-NAV

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
Working pressure: 20,000 PSI*
1,379 bar / 137.9 MPa*
HS code: 73079900
Country of origin: Norway

Technical info

For use with MP-GAV and MP-NAV. Dimensionally compatible with the established 20,000 psi Medium Pressure cone-and-thread connection geometry.

* The stated working pressure is based on Intermec's established design calculations, dimensional design criteria and more than 35 years of experience with high-pressure fittings in demanding offshore and oil & gas applications. Suitability depends on correct installation, mating connection, material and operating conditions.