


PRODUCT GROUP
4102
2 Wire

MATERIAL
SS316L
Stainless steel

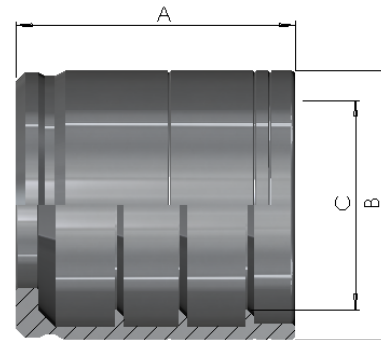

Crimp Sleeve 2 Wire Non-Skive

2-wire braided · Non-skive · Made in Norway

Dimensions

Dimensions in mm

Item number	Hose size	Sleeve type	A	B	C	Weight (kg)
41020404316	1/4"	2wire Non-Skive	25	Ø23	Ø16	0.029
41020606316	3/8"	2wire Non-Skive	28	Ø27	Ø20	0.038
41020808316	1/2"	2wire Non-Skive	31	Ø30	Ø23.5	0.043
41021010316	5/8"	2wire Non-Skive	31	Ø33.2	Ø26.5	0.046
41021212316	3/4"	2wire Non-Skive	32	Ø37	Ø30	0.068
41021616316	1"	2wire Non-Skive	41	Ø48	Ø39	0.110
41022020316	1 1/4"	2wire Non-Skive	48	Ø60	Ø49.5	0.190
41022424316	1 1/2"	2wire Non-Skive	48	Ø67	Ø56	0.255
41023232316	2"	2wire Non-Skive	54	Ø80	Ø68.8	0.349

Product specifications

Hose compatibility

2-wire braided
EN 853 2SN / SAE 100 R2AT
Hose size: 1/4"-2"

Sleeve & assembly

Crimp sleeve
Non-skive assembly
For standard hose inserts
Customer must verify hose, insert and sleeve compatibility

General product information

Material: AISI 316L
EN 1.4404 / UNS S31603
HS code: 73079900
Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated insertion depth, crimp diameter and tolerances. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.