


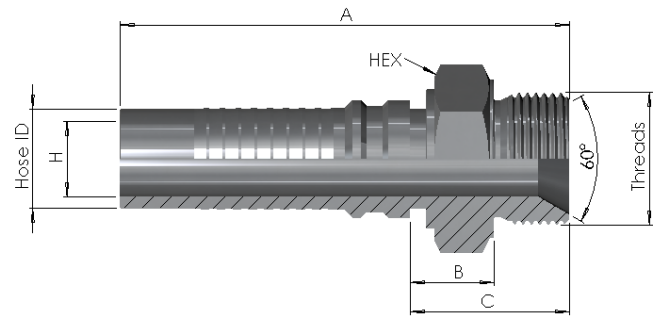

Interlock Hose Insert x BSPP Male 60° Internal Cone

60° connection · Straight · Made in Norway

Dimensions & variants

Dimensions in mm

Item number	Hose ID	DN	Threads	A	B	C	H	Hex
IL02001212316	3/4"	20	G 3/4"	99	20	37	Ø14	32
IL02001616316	1"	25	G 1"	113	22	41	Ø19	41
IL02002020316	1 1/4"	32	G 1 1/4"	133	23	45	Ø25	50
IL02002424316	1 1/2"	40	G 1 1/2"	139	24	46	Ø31	55
IL02003232316	2"	50	G 2"	154	30	56	Ø42	70

Article number: IL0200 | 12 | 12 | 316

Series | Hose size code | BSPP thread size code | Material

Product specifications

End 1 — Hose connection	End 2 — Threaded connection	General product information
Interlock Hose Insert Hose size: 3/4"-2" Compatible sleeve series 5004, 5006	BSPP Male Straight · 60° Internal Cone Connection: ISO 8434-6 / ISO 1179-2 Thread: ISO 228-1	Material: AISI 316L EN 1.4404 / UNS S31603 HS code: 73079900 Country of origin: Norway

Technical info

Hose, insert and sleeve compatibility must be verified for the selected hose type and size. Use validated hose preparation and crimping data. Assembly working pressure must not exceed the lowest component pressure rating, adjusted for temperature and service conditions.